


Remote control function:

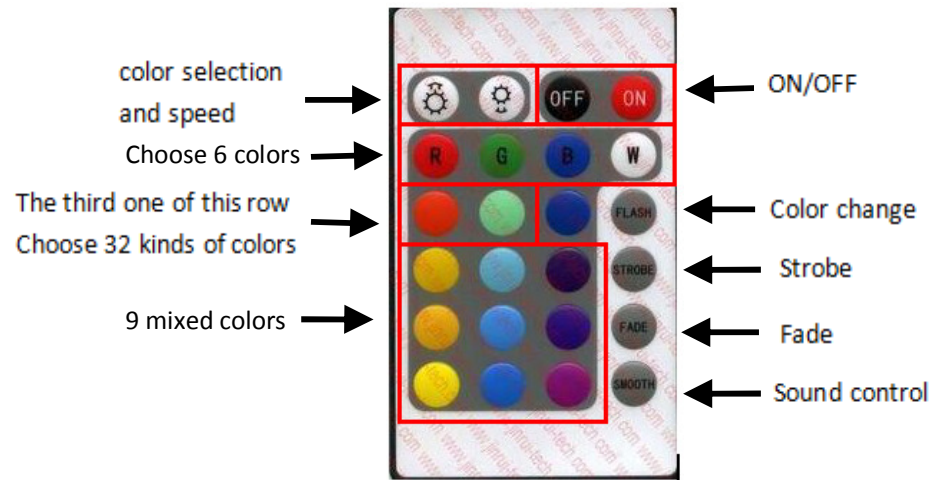

Notes:

1. After press button of the Flash / Strobe / Fade, the UP and DOWN button on the remote control can change the speed.
2. After press the sound control function button, and the UP and DOWN button on the remote controller can change 3 kinds of sound control mode.
3. The third button of the third row on the remote control is for choosing "32 kinds of mixed colors", press it firstly and then use UP and DOWN button choose the color needed.

Specification:

Input Power: AC100V~240V 50~60Hz

Light Source: 4pcsX 12W 6IN1 RGBWA+UV LEDs

Lens Angle: 10°

Control Mode: DMX 512, Sound active, Stand-alone and Master/Slave

Net Weight: 1.6 kg

Product Size: 24.8x21x7cm



USER MANUAL

Creator DLX ECO Trusslight



Please read over this manual before operating this light
GLG is a brand name of GOED licht en geluid Netherlands

LED DISPLAY MENU



MENU UP DOWN ENTER

MENU Function:

Display Mode	Function Instruction
A001 (A001-A512)	10CH Mode
d001 (d001-d512)	6CH Mode
CL01 (CL01-CL32)	Static colors (32 kinds)
CC99 (CC01-CC99)	Color change mode
EE99 (EE01-EE99)	Fade mode
FF99 (FF01-FF99)	Mutation mode
ST99 (ST01-ST99)	Full light strobe
SE60 (SE01-SE99)	Sound control sensitivity adjustment
SOU1 (SOU1/2/3)	Sound control mode SOU1: sound control color change. SOU2: sound control color change strobe. SOU3: sound control color change mutation.
LED (ON/OFF)	LED background light switch ON/OFF
IRCL (ON/OFF)	IR control switch ON/OFF
Test	Auto testing
R255 (R000-R255)	RED dimming from dark to bright
G255 (G000-G255)	Green dimming from dark to bright
B255 (B000-R255)	BLUE dimming from dark to bright
W255 (W000-R255)	WHITE dimming from dark to bright
Y255 (Y000-R255)	AMBER dimming from dark to bright
P255 (P000-R255)	UV dimming from dark to bright

DMX Values and Functions:

CH	6CH	10CH
CH1	0: close light 1-255: Red dimming	0: close light 1-255: Total dimming
CH2	0: close light 1-255: Green dimming	0: close light 1-255: Red dimming
CH3	0: close light 1-255 Blue dimming	0: close light 1-255: Green dimming
CH4	0: close light 1-255: White dimming	0: close light 1-255 Blue dimming
CH5	0: close light 1-255: Amber dimming	0: close light 1-255: White dimming
CH6	0: close light 1-255: UV dimming	0: close light 1-255: Amber dimming
CH7		0: close light 1-255: UV dimming
CH8		0-8: close light 9-255: strobe (slow to fast)
CH9		0-49: close light 50-89: color change mode 90-129: mutation mode 130-199: fade mode 200-219: console sound control 1 220-239: console sound control 2 240-255: console sound control 3
CH10		0: close light 1-255: speed (slow to fast)